


KLORMAN

2 0 0 0 TM

INTL. PATENTS PENDING

**Versatile, Trouble Free
Commercial Disinfection**

**For use with Klorman Watertech
Calcium Hypochlorite Pellets**

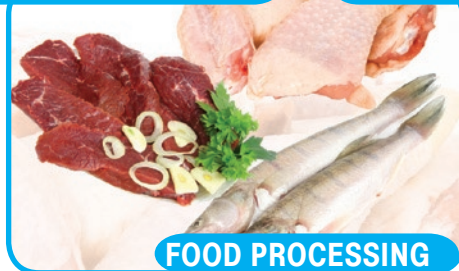


FOOD PROCESSING




FRESH PRODUCE

HOW IT WORKS:

For use with Klorman Watertech Calcium Hypochlorite Pellets

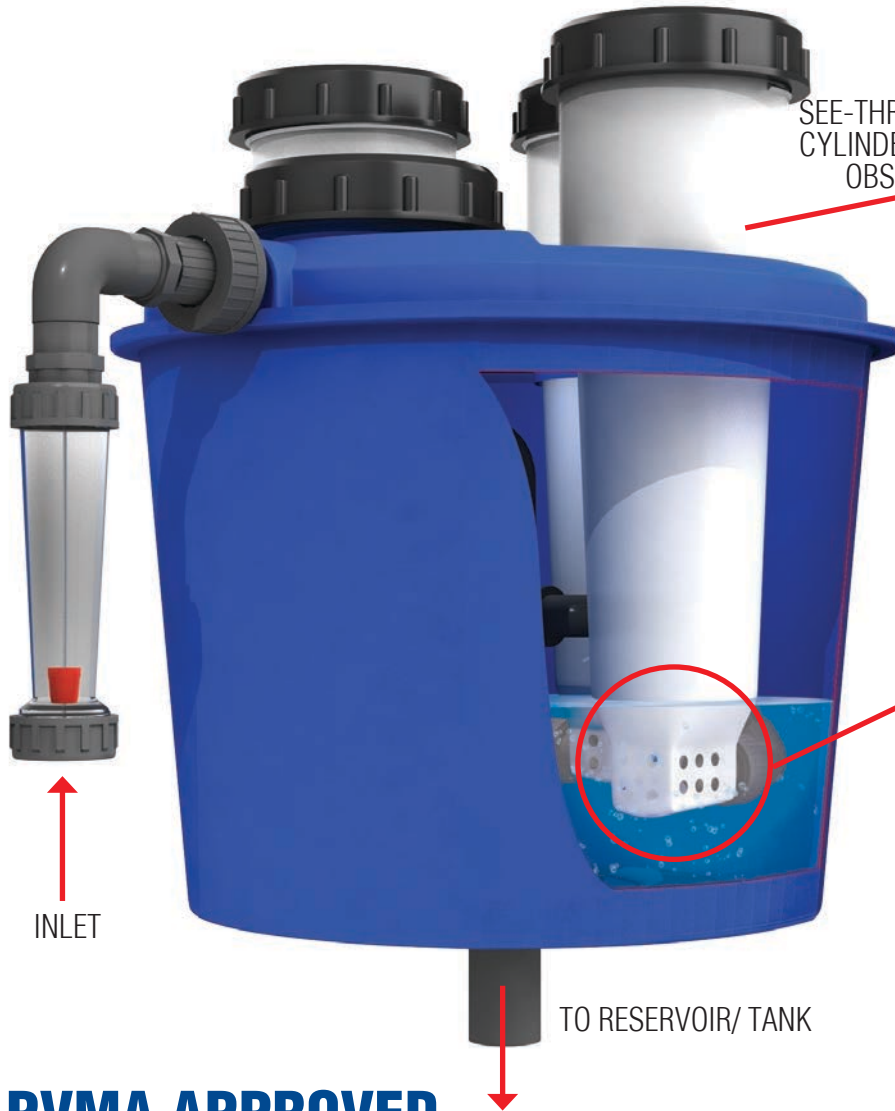

SEE-THROUGH REFILL CYLINDERS FOR EASY OBSERVATION

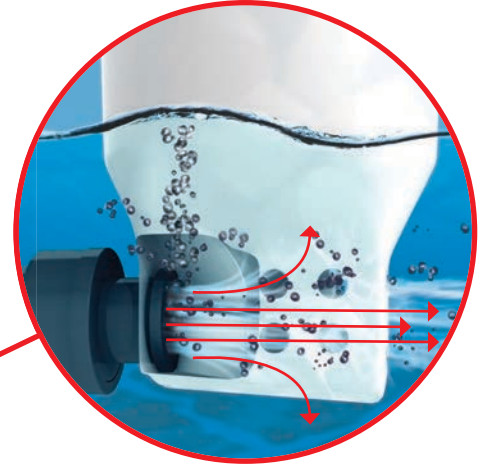

CONTACT CHAMBER
Inlet-jet strips layers of chemical off only the lower-most tablets/'chips', while remaining chemical stays dry


Water level instantly drops below the contact chamber when flow stops, allowing refill tubes to drain

APVMA APPROVED PELLETS

STANDARD PERFORMANCE PARAMETERS*

MINIMUM FLOW RATE PER HOUR (RECOMMENDED)	MAXIMUM FLOW RATE PER HOUR (RECOMMENDED)	AVG Chlorine Delivery Range Per Dosing Unit (ppm)
600Lt (316Gal)	5000Lt (1315Gal)	50ppm – 350ppm

*Note: Individual results may vary due to installation/site-specific factors eg: system pH, Chlorine Demand, Water Temperature & the chemical formulation employed

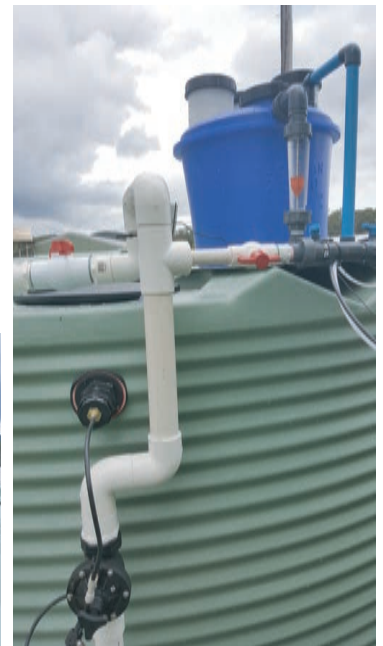

KLORMAN INDUSTRIES PTY LTD
Excellence through Innovation

Klorman Industries Pty Ltd
P: 02 9773 0934
Klorman Industries SA/NT Pty Ltd
P: 08 8447 8684
klorman-industries.com